


NOTE:

WHERE PERMITTED BY VDOT, UTILITY INSTALLATION SHALL BE AT THE QUARTER POINT OF THE ROAD.

PARALLEL INSTALLATION
NO SCALE

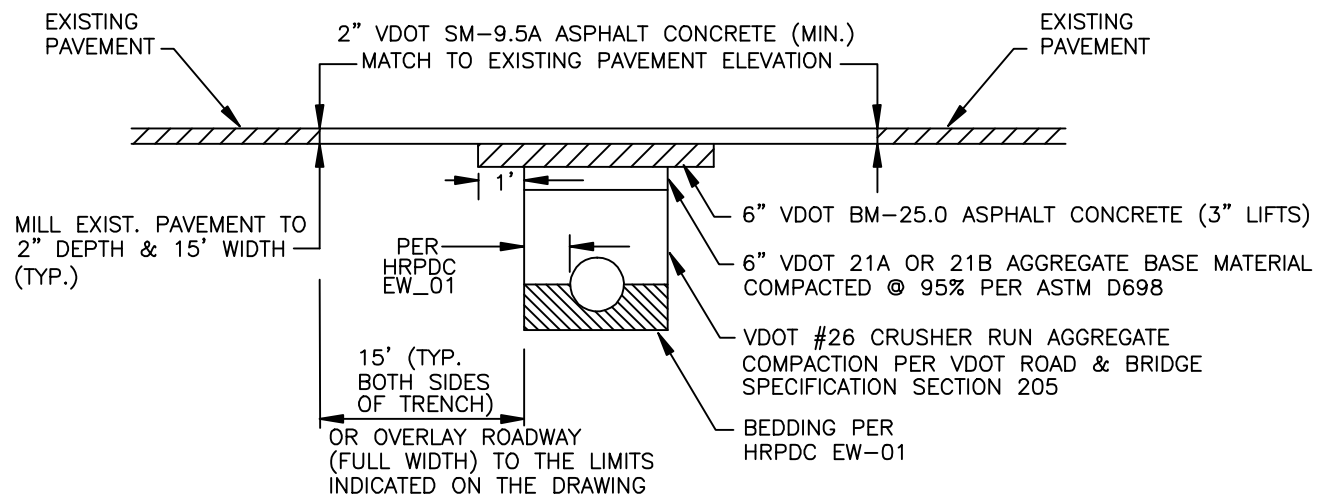

PERPENDICULAR INSTALLATION
NO SCALE

NOTE:

PER VDOT THE PERMITEE WILL BE HELD RESPONSIBLE FOR ANY SETTLING OF BACKFILL OR PAVEMENT FOR A PERIOD OF 3 YEARS AFTER COMPLETION AND ACCEPTANCE OF THE WORK. IF THE TRENCH WIDTH IS GREATER THAN 4' WIDE OR OPEN CUT GREATER THAN 16 SQUARE FEET, THE ROADWAY SHALL BE RESURFACED WITH LIKE MATERIAL THAT IS EXISTING FOR A DISTANCE OF 15' ON EITHER SIDE OF THE DISTURBED AREA FROM THE EDGE OF PAVEMENT TO THE EDGE OF PAVEMENT.



REVISION DATE	COMMENT
3/25/05	WORDING OF TOP NOTE REARRANGED
SEPT 2007	REVISED TRENCH WIDTH TO REFERENCE HRPDC EW_01

**BITUMINOUS PAVEMENT PATCHING
FOR UTILITY INSTALLATION
WITHIN VDOT SECONDARY ROADS**

DWG NO. PP.1	SCALE: NONE
DWN BY: DAW	DATE: JUNE 2004